
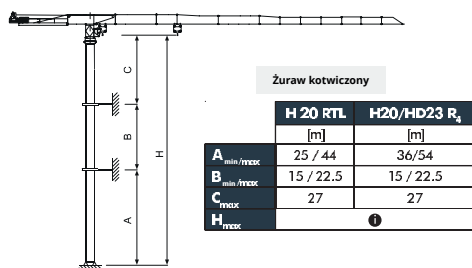




Tabela udźwignów

i		CTT 331-12																			
		m	10	15	20	25	30	35	40	45	50	52	55	57	60	62	65	67	70	72	75
6 t	- 41,2 m	t	6	6	6	6	6	6	6	5,42	4,78	4,57	4,27	4,09	3,84	3,69	3,48	3,35	3,17	3,06	2,90
6 t	- 40 m	t	6	6	6	6	6	6	6	5,19	4,53	4,10	4	3,82	3,56	3,41	3,19	3,06	2,87	2,76	2,60
12 t	- 22,2 m	t	12	12	12	10,48	8,48	7,06	6	5,19	4,53	4,10	4	3,82	3,56	3,41	3,19	3,06	2,87	2,76	2,60
6 t	- 44,4 m	t	6	6	6	6	6	6	6	5,91	5,23	5,00	4,68	4,48	4,22	4,06	3,83	3,69	3,50		
6 t	- 42,7 m	t	6	6	6	6	6	6	6	5,64	4,95	4,71	4,39	4,20	3,93	3,76	3,54	3,40	3,20		
12 t	- 23,6 m	t	12	12	12	11,23	9,11	7,61	6,50	5,64	4,95	4,71	4,39	4,20	3,93	3,76	3,54	3,40	3,20		
6 t	- 46,8 m	t	6	6	6	6	6	6	6	5,57	5,32	4,99	4,78	4,51	4,34	4,10					
6 t	- 45,8 m	t	6	6	6	6	6	6	6	5,40	5,15	4,81	4,60	4,31	4,14	3,90					
12 t	- 25,1 m	t	12	12	12	12	9,79	8,21	7,03	6,12	5,40	5,15	4,81	4,60	4,31	4,14	3,90				
6 t	- 49,3 m	t	6	6	6	6	6	6	6	5,91	5,65	5,30	5,09	4,80							
6 t	- 48 m	t	6	6	6	6	6	6	6	5,72	5,46	5,11	4,89	4,60							
12 t	- 26,1 m	t	12	12	12	12	10,27	8,63	7,41	6,47	5,72	5,46	5,11	4,89	4,60						
6 t	- 51,7 m	t	6	6	6	6	6	6	6	6	5,97	5,60									
6 t	- 50,3 m	t	6	6	6	6	6	6	6	6	5,77	5,40									
12 t	- 27,3 m	t	12	12	12	12	10,81	9,10	7,82	6,83	6,04	5,77	5,40								
6 t	- 50 m	t	6	6	6	6	6	6	6	6	6										
6 t	- 50 m	t	6	6	6	6	6	6	6	6	6										
12 t	- 27,9 m	t	12	12	12	12	11,08	9,32	8,02	7,00	6,20										
6 t	- 45 m	t	6	6	6	6	6	6	6	6											
6 t	- 45 m	t	6	6	6	6	6	6	6	6	6										
12 t	- 28,9 m	t	12	12	12	12	11,53	9,70	8,35	7,30											
6 t	- 40 m	t	6	6	6	6	6	6	6												
6 t	- 40 m	t	6	6	6	6	6	6	6												
12 t	- 29,1 m	t	12	12	12	12	11,60	9,76	8,40												



Inne konfiguracje

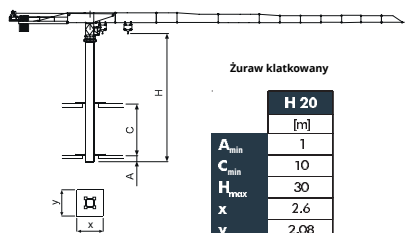


i Skonsultuj z nami


## Wieża Standardowa konfiguracja

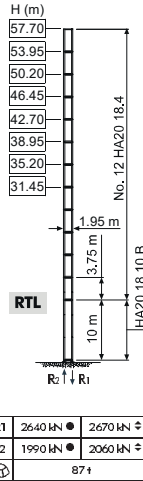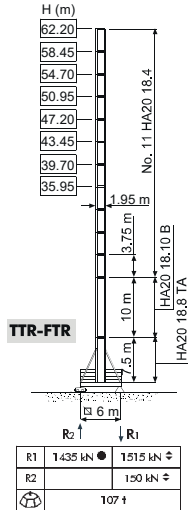


## H20



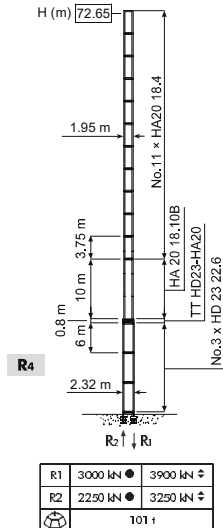



## H20/HD23













- H** Maksymalna wysokość pod hakiem
- Czynnny
- ◆ Pozycja poza pracą
-  Bez ładunku, bez balastu, maksymalna wysokość i ramię.

		
114 * kVA	400 V - 50 Hz / 460 V - 60 Hz	2000/14/CE

\* żuraw nie wyposażony w sprzęt do przemieszczania się

			m/min	f	kW	
	<b>45 AFC 60 45 AFC 60 D2 (VECTOR)</b>		0 ~ 39	6	45	560 m 850 m (D2)
			0 ~ 56	4		
			0 ~ 97	2		
			0 ~ 110	1,7		
			0 ~ 19,5	12		
			0 ~ 28	8		
			0 ~ 48,5	4		
			0 ~ 55	3,4		

	<b>DSR 3 70 D2</b>	12 ~ 36 ~ 72 m/min (50 Hz) 14 ~ 43 ~ 86 m/min (60 Hz)	70/50 Nm
	<b>DCC 5 112 D2</b>	0 ~ 95 m/min	11 kW
	<b>SSR 4 4 65</b>	0,73 r.p.m.	4 × 65 Nm
	<b>TSR 2RG 4M8</b>	12 ~ 24 m/min (50 Hz) 14 ~ 28 m/min (60 Hz)	4 × 80 Nm
	<b>i</b>		

	Wciągarka
	Mechanizm wodzaka
	Mechanizm obrotu
	Mechanizm jazdy torowej
	Dyrektywa na poziom hałasu
	Skonsultuj z nami
	Wymagania dotyczące zasilania
	Zasilanie
	Jazda po łuku