


# T320-16



CE EN14439/C25

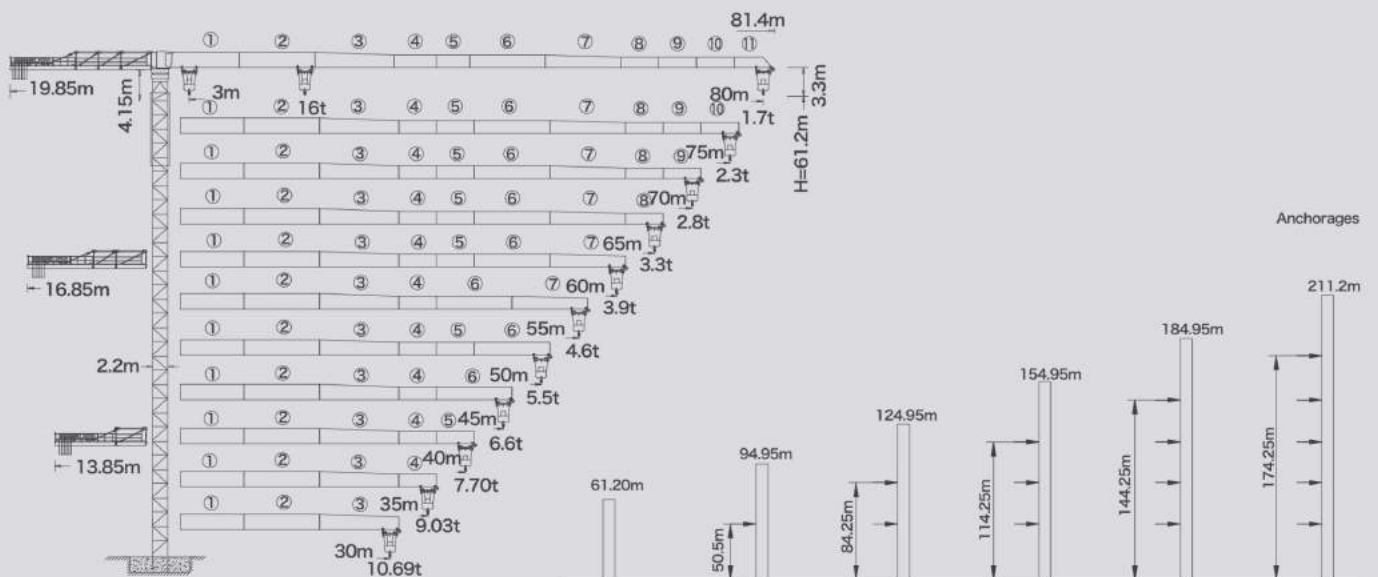


# TOWER CRANE T320-16

R		Max.Capacity	15	20	25	30	35	40	45	50	55	60	65	70	75	80
80m (R=79.55m)	b	3.5-29.0m, 8t	8.00			7.67	6.28	5.25	4.45	3.82	3.30	2.87	2.51	2.20	1.93	1.70
	bb	3.5-16.3m, 16t	16.00	12.51	9.51	7.55	6.16	5.13	4.33	3.70	3.18	2.75	2.39	2.08	1.81	1.58
75m (R=74.55m)	b	3.5-31.3m, 8t	8.00				6.96	5.85	5.00	4.32	3.77	3.31	2.92	2.59	2.30	
	bb	3.5-17.5m, 16t	16.00	13.64	10.43	8.32	6.84	5.73	4.88	4.20	3.65	3.19	2.80	2.47	2.18	
70m (R=69.55m)	b	3.5-32.5m, 8t	8.00				7.29	6.15	5.28	4.58	4.01	3.54	3.14	2.80		
	bb	3.5-18.0m, 16t	16.00	14.15	10.86	8.69	7.17	6.03	5.16	4.46	3.89	3.42	3.02	2.68		
65m (R=64.55m)	b	3.5-33.5m, 8t	8.00				7.59	6.42	5.51	4.79	4.20	3.71	3.30			
	bb	3.5-18.6m, 16t	16.00	14.69	11.28	9.05	7.47	6.30	5.39	4.67	4.08	3.59	3.18			
60m (R=59.55m)	b	3.5-34.2m, 8t	8.00				7.77	6.60	5.69	4.97	4.39	3.90				
	bb	3.5-18.8m, 16t	16.00	14.85	11.45	9.22	7.65	6.48	5.57	4.85	4.27	3.78				
55m (R=54.55m)	b	3.5-35.4m, 8t	8.00					6.89	5.95	5.21	4.60					
	bb	3.5-19.4m, 16t	16.00	15.46	11.93	9.62	7.99	6.77	5.83	5.09	4.48					
50m (R=49.55m)	b	3.5-36.9m, 8t	8.00						7.26	6.28	5.50					
	bb	3.5-20.2m, 16t	16.00		12.53	10.11	8.41	7.14	6.16	5.38						
45m (R=44.55m)	b	3.5-38.3m, 8t	8.00						7.61	6.60						
	bb	3.5-20.9m, 16t	16.00		13.03	10.55	8.79	7.49	6.48							
40m (R=39.55m)	b	3.5-38.7m, 8t	8.00							7.70						
	bb	3.5-21.1m, 16t	16.00		13.18	10.67	8.90	7.58								
35m (R=34.55m)	b	3.5-35.0m, 8t	8.00													
	bb	3.5-21.1m, 16t	16.00		13.20	10.68	8.91									
30m (R=29.55m)	b	3.5-30.0m, 8t	8.00													
	bb	3.5-21.1m, 16t	16.00		13.20	10.69										

## Mechanisms

Slewing	Type	HVV145B1.130A HVV145B2.130A	Hoisting	Type	QPL1690
	0~0.53r/min	2×145N.m		Power	60kW
Trolleying	Type	BP75	970m $\varnothing$ (6 layers) ① Consult us if overtop	III	b 8t 35m/min bb 16t 17.5m/min
	0~80 m/min	7.5 kW		IV	b 4t 70m/min bb 8t 35m/min
				V	b 1.5t 90m/min bb 3t 45m/min



400V(+10%-10%) 50Hz

82.5+4×5.2 kW

